


KERAPROTECT®



THE DISTINCTIVE
CLASSIC.
ROUGH AND
SANDY PROTECTED.

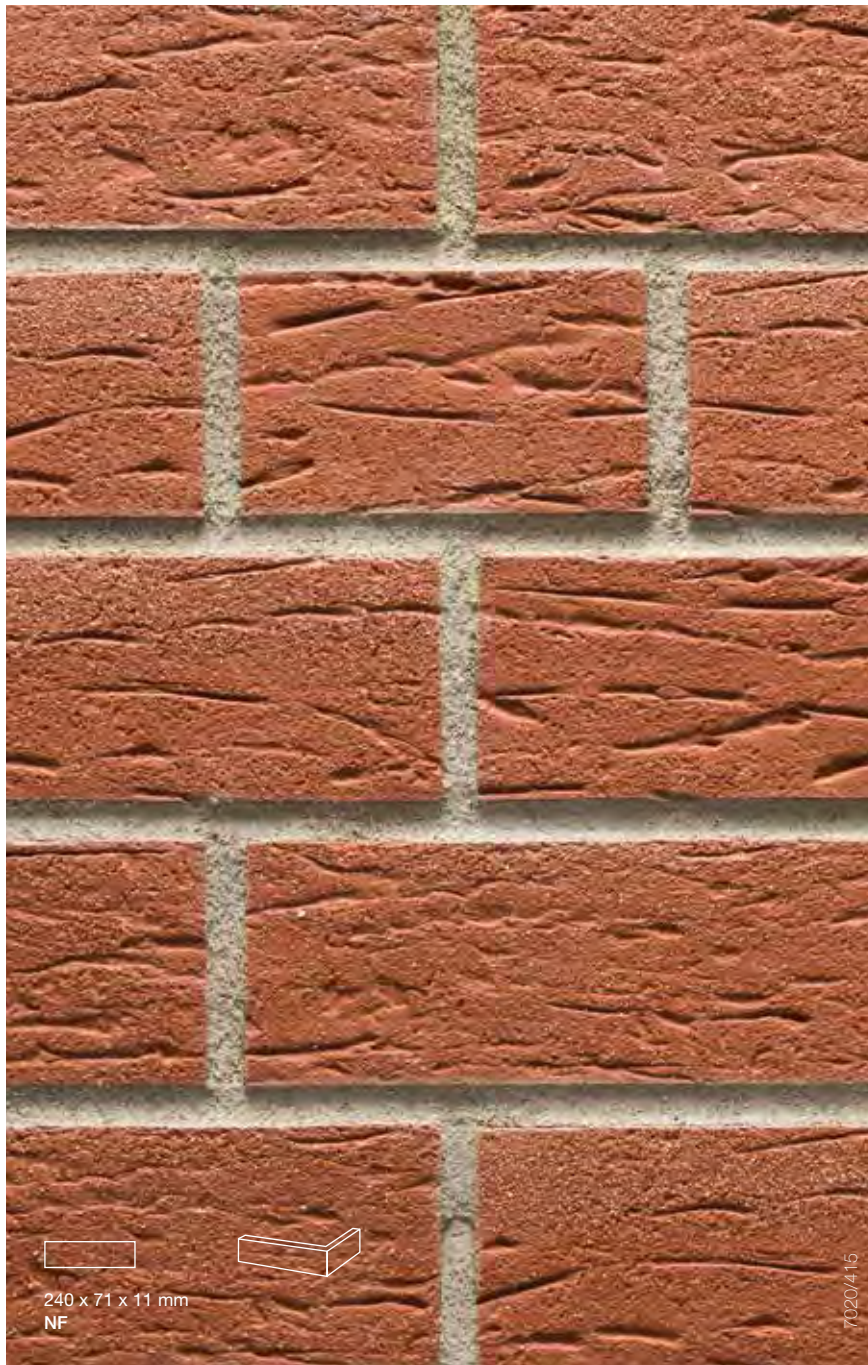

ONCE KNOWN AS THE “DUTCH” BRICK SLIP – NOW AN INTERNATIONAL SUCCESS.

As rough and grainy as sharkskin is the feel of this classic “Dutch” tile to the touch. The unusual clinker look is not the only advantage this sturdy ceramic with the special tunnel kiln quality has to offer.

Whether a new development or the renovation of an older structure, the same questions arise again and again: Is heat being lost too quickly to the outside? Is noise entering the building too easily?

For noise can be as annoying as the unavoidable maintenance costs of other facade claddings. A facade clad with Keraprotect, however, offers you durable protection of extruded ceramics at optimal costs.

KERAPROTECT®

COARSE SAND. UNMISTAKEABLE. CLASSIC.

FIRINGS AND FORMAT



410 groningen
Δ < 6 % · DIN EN 14411, Gr. AII_B - Part 1

NF




405 amsterdam
Δ < 3 % · DIN EN 14411, Gr. AI_B

NF



415 breda
Δ < 3 % · DIN EN 14411, Gr. AI_B

NF

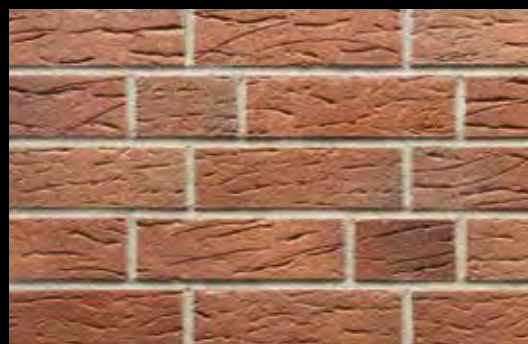

416 rotterdam
Δ < 3 % · DIN EN 14411, Gr. AI_B

NF



429 aardenburg
Δ < 3 % · DIN EN 14411, Gr. AI_B

NF



430 den haag
Δ < 6 % · DIN EN 14411, Gr. AII_B - Part 1








NF

PRODUCT DETAILS

KERAPROTECT®

DIN EN 14411



format no.	7020	7021
description	clinker brick slips	corner ¹⁾
nominal size (cm)	NF	NF
production size (mm)	240 x 71 x 11	240 x 115 x 71 x 11
 415 breda	★ PG 11 ●	★ PG 77 ●
 416 rotterdam	★ PG 14 ●	
 405 amsterdam	★ PG 17 ●	
 410 groningen		
 417 eindhoven		
 429 aardenburg		
 430 den haag		
pieces per bundle	24	16
pieces per m²/rm incl. joint	48,00	12,50
pieces per pallet	2.208	1.040
m²/rm per bundle	0,50	1,28
m²/rm per pallet	46,00	83,20
bundles per pallet	92	65
kg per pallet	919	593
kg per piece	0,416	0,570
kg per m²/rm	19,968	7,125
kg per bundle	9,984	9,120
surcharge	❖	❖

★ = Discount on pallets.


● = Normally available ex stock.

PG = Price group (please see current price list).

❖ = Minimum quantity: each open box will incur a surcharge.

¹⁾ = The Ströher standard for angular accuracy in angled brick slips is based on the DIN 105 standard for exposed clinker brickwork, but with only 50% of the permissible tolerance values. The Ströher specification is thus +/- 1°. This equates to a maximum deviation of +/- 4 mm on the stretcher side and +/- 2 mm on the header side for a corner with the 240 x 115 mm format.

The formats shown are illustrative drawings and are not binding. All information without guarantee.

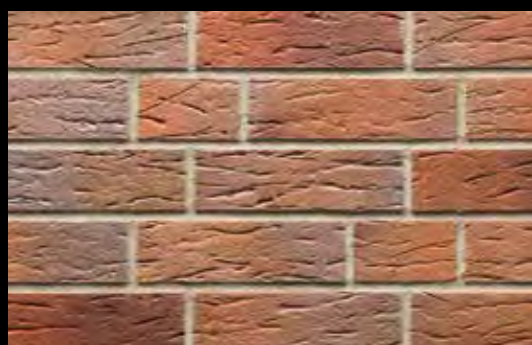

417 eindhoven

Δ < 3 % · DIN EN 14411, Gr. A₁

NF

* Ströher is the only German manufacturer offering a 25-year frost resistance guarantee on the following extruded products that have been correctly installed by a qualified professional tiler: Keraplatte® Selected, Keraplatte® Zoé, Keraplatte® Gravel Blend, Keraplatte® Epos, Keraplatte® Aera T, Keraplatte® Aera, Keraplatte® Roccia X, Keraplatte® Roccia, Keraplatte® Asar, Keraplatte® Terra, Keraplatte® Duro, Terrace slab TerioTec® X Profile, Terrace slab TerioTec® X, Terrace Slab TerioTec®, Stalotec®, Brickwerk, Brick 60, Wasserbrand, Kontur, Stiltreu, Riegel 50, Handstrich, Steinlinge, Glanzstücke, Zeitlos, Keraprotect® and Keravette®. Please find further explanations in our general terms and conditions.



Completely frost-resistant
*25 year guarantee

Tunnel kiln fired

Suitable for
insulation systems

Wheatproof

Economic

In compliance
with DIN EN

Fade-free and
colourfast

Easy maintenance
and hygienic

Ecofriendly

Resistant to
chemicals

Glow-resistant
and fireproof

Anti-static