

# WASSERBRAND NEW



GENTLY ROUGH  
WATER-STRUCK LOOK  
WITH MODERN ACCENTS.



81140/670  
 Copied! Surround 81111 FPM tiles. Catalogue available separately. [www.fpm.it/de](http://www.fpm.it/de)

## CONFIDENT HISTORICAL WATER-STRUCK CONTOURING ON THE FULL BODY.

The light nuanced shades appear lovely but still sharp. The gently rough surfaces and detailed structures are furrowed by water and powerful. It is the skilful blend of untamed and yet delicate accents that gives this simple yet expressive clinker brick slip its striking contemporary look. Because, here, the look of historical water-struck bricks is not manufactured in traditional solid brick, but extruded as a modern clinker brick slip with innovative surface technologies.

# WASSERBRAND NEW

## POWERFUL. TENDER. UNTAMED.

### FIRINGS AND FORMAT



**670 sandweiß**  
Δ < 3 % · DIN EN 14411, Gr. A<sub>1</sub>




DF



**671 kornbeige**  
Δ < 3 % · DIN EN 14411, Gr. A<sub>1</sub>



DF

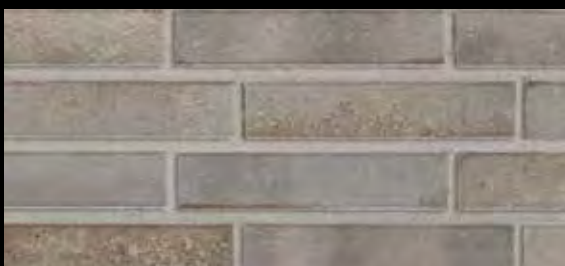

**672 zinngrau**  
Δ < 3 % · DIN EN 14411, Gr. A<sub>1</sub>



DF

## PRODUCT DETAILS

### WASSERBRAND

DIN EN 14411



format no.	8140	8141	8143
description	clinker brick slips	corner <sup>1)</sup>	lintel angle
nominal size (cm)	DF	DF	DF
production size (mm)	240 x 52 x 12	240 x 50 x 52 x 12	240 x 52 x 50 x 12
670 sandweiß	★ PG 31 ●	★ PG 752 ●	★ PG 777 ●
671 kornbeige			
672 zinngrau	★ PG 342 ●	★ PG 753 ●	★ PG 778 ●
pieces per bundle	52	22	18
pieces per m <sup>2</sup> /m incl. joint	64,00	16,13	4
pieces per pallet	4.212	1.430	972
m <sup>2</sup> /m per bundle	0,81	1,36	4,50
m <sup>2</sup> /m per pallet	65,81	88,65	243,00
bundles per pallet	81	65	54
kg per pallet	1.474	490	573
kg per piece	0,350	0,343	0,590
kg per m <sup>2</sup> /m	22,400	5,533	2,360
kg per bundle	18,200	7,546	10,620
surcharge	❖	❖	❖

★ = Discount on pallets. ● = Normally available ex stock. PG = Price group (please see current price list). ❖ = Minimum quantity: each open box will incur a surcharge.

<sup>1)</sup> = The Ströher standard for angular accuracy in angled brick slips is based on the DIN 105 standard for exposed clinker brickwork, but with only 50% of the permissible tolerance values. The Ströher specification is thus +/- 1°. This equates to a maximum deviation of +/- 4 mm on the stretcher side and +/- 2 mm on the header side for a corner with the 240 x 115 mm format.

The formats shown are illustrative drawings and are not binding. All information without guarantee.

\* Ströher is the only German manufacturer offering a 25-year frost resistance guarantee on the following extruded products that have been correctly installed by a qualified professional tiler: Keraplatte® Selected, Keraplatte® Zoé, Keraplatte® Gravel Blend, Keraplatte® Epos, Keraplatte® Aera T, Keraplatte® Aera, Keraplatte® Roccia X, Keraplatte® Roccia, Keraplatte® Asar, Keraplatte® Terra, Keraplatte® Duro, Terrace slab TerioTec® X Profile, Terrace slab TerioTec® X, Terrace Slab TerioTec®, Stalotec®, Brickwerk, Brick 60, Wasserbrand, Kontur, Stiltreu, Riegel 50, Handstrich, Steinlinge, Glanzstücke, Zeitlos, Keraprotect® and Keravette®. Please find further explanations in our general terms and conditions.

